



EDVX



EDVSS40



EDVXHD11

- More than 2 Lakhs Installations
- Designed specially to drain sludge and rust laden condensate
- Reliable all digital electronic circuitry
- ON and OFF timing adjustable
- Power & Drain status indicator
- Extended cycle time up to 32 hrs adjustable



Automatic Drain Valves
Series EDV-X

Applications



AirReceivers



DropLegs



AirDryers




Filters /Separators



Valve Specifications

ItemCode	PE076	PE078	PE089	PE095	PE094
Model	EDVX11	EDVX13	EDVXHD11	EDVXHD11-1"	EDVXSS40
Inputvoltage(AC)	230	230	230	230	230
Averagepowerconsumption(watts)	7	7	7	7	7
Min.workingpressure(Kg/cm ² (g))	2	2	4	4	2
Max.workingpressure(Kg/cm ² (g))	16	70	16	16	40
TimingCycle(min)	1 to 120	1 to 120	1 to 120	1 to 120	18min to 32hrs
Drain(Sec)	1 to 25	1 to 25	1 to 25	1 to 25	1 to 25
Valveorifice(mm)	1.3	1.3	12.5	25	1.3
Endconnectioninlet	1/2" BSP(F)	1/2" BSP(F)	1/2" BSP(F)	1" BSP(F)	1/2" BSP(F)
Endconnectionoutlet	1/2" BSP(F)	1/2" BSP(F)	1/2" BSP(F)	1" BSP(F)	1/2" BSP(F)
EnvironmentalProtections	IP55	IP55	IP55	IP55	IP55
MaximumfluidTemperature (DegC)	75	75	75	75	75
Maximumcondensatedischarge quantityat7Kg/cm ² (g)(Liters/hours)	29	29	200	400	29
Air compressorafter cooler(cfm)	100	100	200to1000	1000andabove	100
WetAirreceiver(m ³)	1	1	2 to 5	6andabove	0.5
Prefilter(cfm)	800	800	1000to8000	9000andabove	800
Refrigerationdryer(cfm)	200	200	2000	2500andabove	200
Afterfilter (cfm)	800	800	1000to8000	9000andabove	800
DryAir receiver(m ³)	1	1	2 to 55	6andabove	0.5
ValveDimensionLxBxH(mm)	97x90x146	97x90x146	101x90x190	130x100x240	97x90x146
Weight(Kg)	0.65	0.75	0.9	1.8	0.75

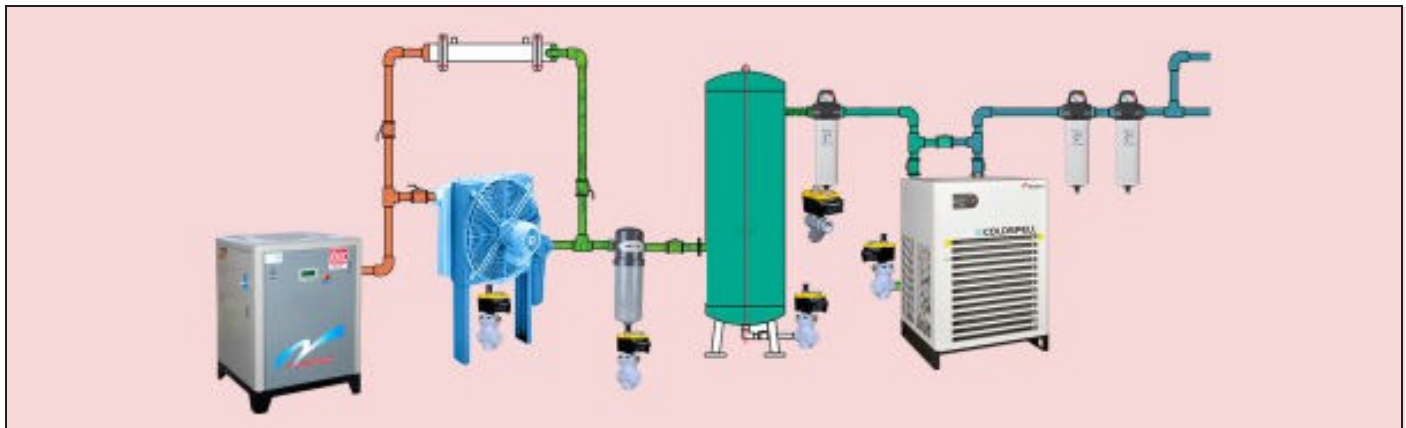

Our other Range of Products

Level Sensing Auto Drain Valve | Desiccant Dryer (Heaterless) | Blower Reactivated Dryer | Submicron Filter | Refrigeration Type Dryer | Oxygen & Nitrogen Generators | Flex Dryer



REACH PNEUMATICS

42/2, 6th Cross, 5th Main, Malleswaram, Bangalore – 560003. Ph.: 080- 23465570, 23469620

e-mail : reachpneumatics@gmail.com Website : www.reachpneumatics.com

